



THE SSC CONTROLS COMPANY

PREMIER INDUSTRIAL CONTROLS


Product Information Sheet

S100-Series Foot Switches

The S100-Series foot switches make it easy to turn electrical equipment on and off with the foot, freeing the hands to perform other operations or providing ergonomic improvement to a workstation. The simple momentary action occurs by pressing down on the front of the switch; an internal spring will return the switch to the "off" position upon release. Ideal for light-duty industrial, medical, dental, and office equipment.

Design features:

- Momentary action – press and hold to turn on, release to turn off.
- Durable steel case with powder-painted finish.
- Cover pivots on a steel shaft, providing smooth, precise motion.
- Wide, low-profile shape makes it easy on the user.
- Heel rests on the floor when using this switch.
- Heavy-duty cable with flexible strain relief.
- Non-slip 3M® traction pads.
- Certified to CSA and UL standards.

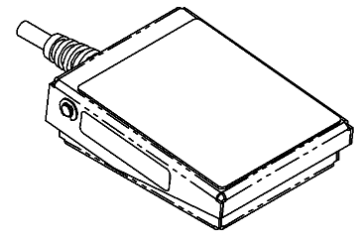

Quality features:

- Designed and manufactured under a quality system certified to ISO 9001 requirements.
- Includes a 1-year warranty on parts and labor.
- Made in USA of imported and domestic components.



(cable with 3-pronged series connector shown)

Dimensions, L x W x H: 4.3" x 3.5" x 1.4"

Weight (S100-1001): 1.4 pounds

IEC enclosure rating: IP-21

Finish: powder paint, black



Warning: To avoid personal injury, do not use foot switches on machinery lacking effective point-of-operation safeguards. Disconnect input power before installing or removing this control.

Model	Action*	Rating	Contacts	Cord Set	Price	Certification
S100-1001	momentary	10 amp, 125 VAC	SPDT	8-foot cable with connector	\$18.40	
S100-1002	momentary	10 amp, 125/250 VAC	SPDT	8-foot cable with leads	\$17.00	
S100-1501	momentary	15 amp, 125 VAC	SPDT	8-foot cable with connector	\$19.75	
S100-1502	momentary	15 amp, 125/250 VAC	SPDT	8-foot cable with leads	\$18.10	

*Momentary action: Press and hold to turn on, release to turn off.

The SSC Controls Company
8658 Tyler Boulevard Mentor, Ohio 44060
Phone: 440 205-1600 Fax: 440 205-1700